

REGOLATORI AD INNESTO RAPIDO

PUSH-IN FLOW REGULATORS
REGULATEURS DE DEBIT INSTANTANES
DROSSEL MIT STECKANSCHLUSS

SCHEDA TECNICA SPECIFICATION SHEET - FICHE TECHNIQUE - TECHNISCHES BLATT

serie METALLO




METAL line
serie METAL
METALL-Baureihe

MATERIALI DI COSTRUZIONE
OTTONE (EN 12164-CW614N) NICHELATO
ZAMA-15 (UNI 3717) NICHELATA
GUARNIZIONI IN GOMMA ANTIOLIO NBR
PRESSIONE MAX D'ESERCIZIO: 10 BAR (1 MPa)
TEMPERATURA DI LAVORO: -10°C (263°K), +80°C (353°K)

MATERIALS OF CONSTRUCTION
NICKEL-PLATED BRASS (EN 12164-CW614N)
NICKEL-PLATED ZAMA-15 (UNI 3717)
OIL-PROOF RUBBER PACKINGS NBR
MAX WORKING PRESSURE: 10 BAR (1 MPa)
WORKING TEMPERATURE: -10°C (263°K), +80°C (353°K)

MATERIEL DE FABRICATION
LAITON (EN 12164-CW614N) NICKELE
ZAMA-15 (UNI 3717) NICKELE
JOINTS EN CAOUTCHOUC ANTI-HUILE NBR
PRESSION MAXI D'EXERCICE: 10 BAR (1 MPa)
TEMPERATURE DE TRAVAIL: -10°C (263°K), +80°C (353°K)


HERSTELLUNGSMATERIAL
MESSING (EN 12164-CW614N), VERNICKELT
ZAMAK-15 (UNI 3717), VERNICKELT
DICHTUNGEN NBR, ÖLBESTÄNDIG
HÖCHSTBETRIEBSDRUCK: 10 BAR (1 MPa)
BETRIEBSTEMPERATUREN: -10°C (263°K), +80°C (353°K)

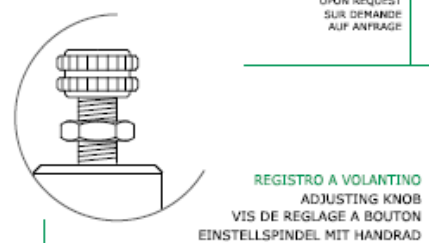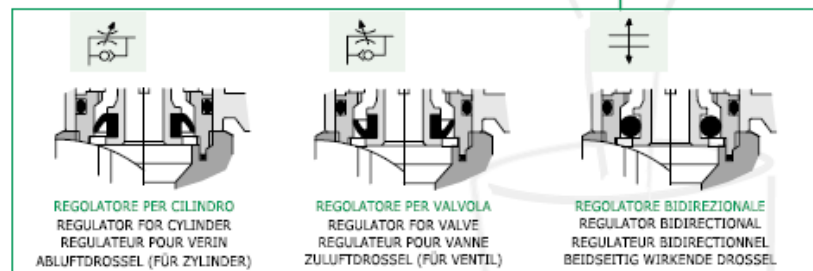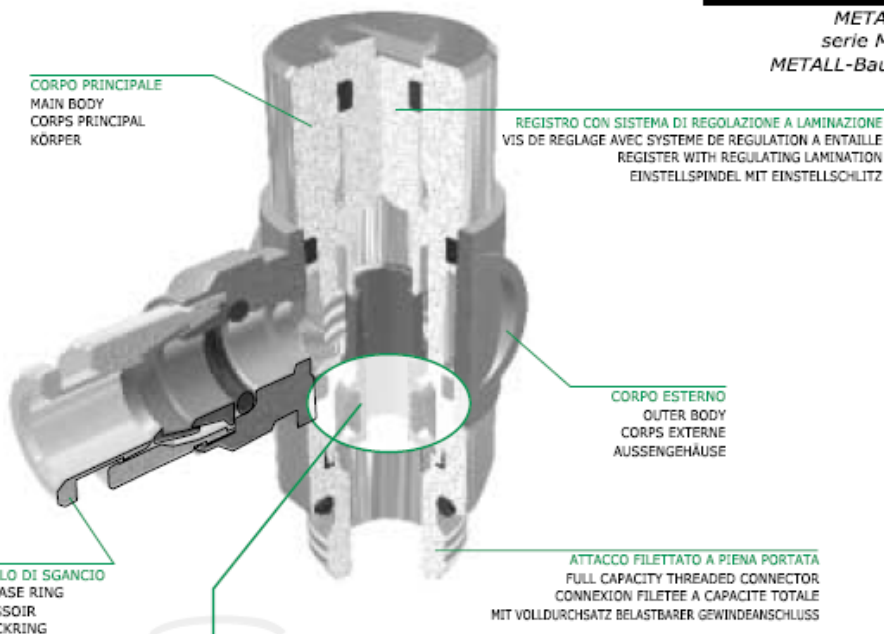

O-RING/GUARNIZIONI
OIL-PROOF RUBBER
JOINTS
DICHTUNGEN

ESENTI DA SILICONE
SILICONE FREE
LIBRES DE SILICONE
SILIKONFREI

INFORMAZIONI SULLA CODIFICA ARTICOLI: vedi pag 14-16
INFORMATION ABOUT THE ITEMS CODING: see pages 14-16
RENSEIGNEMENTS SUR LA CODIFICATION DES ARTICLES: voir aux pages 14-16
BESTELLSYSTEM: siehe seite 14-16

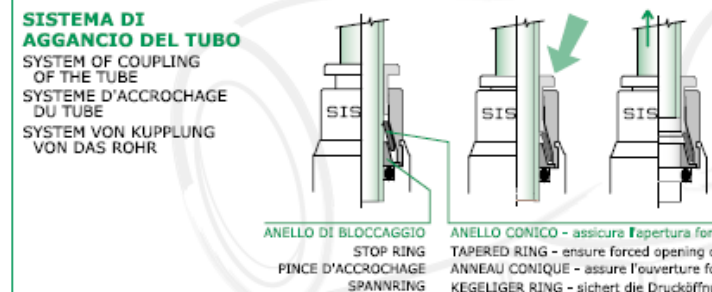

AZIONANDO TOTALMENTE L'ANELLO DI SGANCIO, SI COMANDA L'APERTURA DELL'ANELLO DI BLOCCAGGIO OLTRE IL DIAMETRO DEL TUBO, GARANTENDO L'ESTRAZIONE SENZA DANNO.
BY PUSHING THE RELEASE RING, THE INNER STOP RING EXPANDS TO A DIAMETER GREATER THAN THE HOSE OUT SIDE DIAMETER ALLOWING EXTRACTION WITHOUT DAMAGE.
EN ENFONÇANT A FOND L'ANNEAU DE DÉCHOCAGE, ON COMMANDE L'OUVRETTURE DE L'ANNEAU DE BLOCAGE AU - DELÀ DU DIAMÈTRE DU TUBE GARANTISSANT L'EXTRACTION SANS DOMMAGE.
BEIM EINDRÜCKEN DES DRUCKRINGES BIS ZUM ANSCHLAG, ÖFFNET SICH DER SPANNRING UND DAS ROHR KANN SCHADLOS HERAUS GEZOGEN WERDEN.

ANELLO DI BLOCCAGGIO
STOP RING
PINCE D'ACCROCHAGE
SPANNRING



ANELLO CONICO - assicura l'apertura forzata dell'anello di bloccaggio
TAPERED RING - ensure forced opening of stop ring
ANNEAU CONIQUE - assure l'ouverture forcée de l'anneau de blocage
KEGELIGER RING - sichert die Drucköffnung des Spannringes



TIPI DI TUBO INNESTABILI
TUBES D'ACCOUPEMENT
SUITABLE FOR
SCHLAUCHTYPEN

RILSAN (PA11/12), POLIURETANO, POLIETILENE, POLIESTERE, TEFLON, NYLON (PA6): ±0,05 (Ø4÷Ø10) - ±0,1 (Ø12÷Ø14).
RILSAN (PA11/12), POLYURETHANE, POLYETHYLENE, POLYESTER, TEFLON, NYLON (PA6): ±0,05 (Ø4÷Ø10) - ±0,1 (Ø12÷Ø14).
RILSAN (PA11/12), POLYURÉTHANE, POLYÉTHYLÈNE, POLYESTER, TEFLON, NYLON (PA6): ±0,05 (Ø4÷Ø10) - ±0,1 (Ø12÷Ø14).
RILSAN (PA11/12), POLYURETHAN, POLYÄTYLEN, POLYESTER, TEFLON, NYLON (PA6): ±0,05 (Ø4÷Ø10) - ±0,1 (Ø12÷Ø14).

SR63/C – SR63/V – SR63/B
SR63 MINI REGULADOR CILINDRICO MACHO

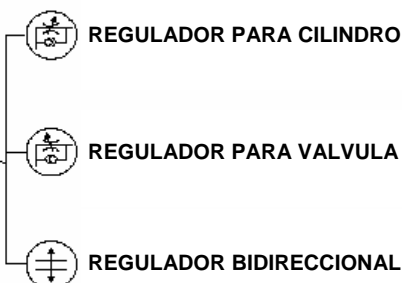

SR63/C




SR63/V





SR63/B

CODIGO	A	B	C	D	E	F	CH	Ø	Q⇒R	R⇒Q	Gr
SR6304M5/C	M5	4	29	4	22,5	10	10	1,2	0-70 NI/min	140 NI/min	19
SR6305M5/C	M5	5	29	4	22,5	10	10	1,2	0-70 NI/min	140 NI/min	19
SR6306M5/C	M5	6	29	4	24	12	10	1,2	0-70 NI/min	140 NI/min	28
SR6304M5/V	M5	4	29	4	22,5	10	10	1,2	0-70 NI/min	140 NI/min	19
SR6305M5/V	M5	5	29	4	22,5	10	10	1,2	0-70 NI/min	140 NI/min	19
SR6306M5/V	M5	6	29	4	24	12	10	1,2	0-70 NI/min	140 NI/min	28
SR6304M5/B	M5	4	29	4	22,5	10	10	1,2	0-70 NI/min	140 NI/min	19
SR6305M5/B	M5	5	29	4	22,5	10	10	1,2	0-70 NI/min	140 NI/min	19
SR6306M5/B	M5	6	29	4	24	12	10	1,2	0-70 NI/min	140 NI/min	28

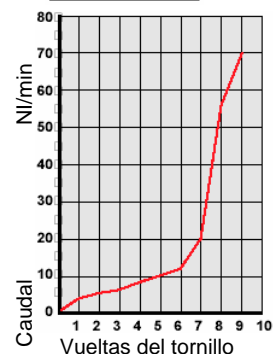

SR64/C – SR64/V – SR64/B
SR64 MINI REGULADOR CILINDRICO MACHO/HEMBRA

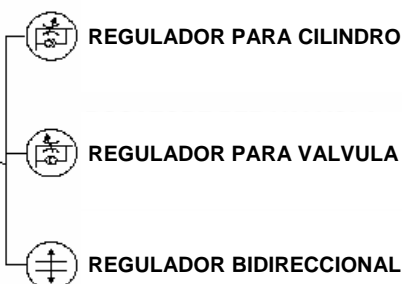

SR64/C




SR64/V






SR64/B


CODIGO	A	B	C	D	E	F	CH	Ø	Q⇒R	R⇒Q	Gr
SR64M5M5/C	M5	M5	29	4	13	10	10	1,2	0-70 NI/min	140 NI/min	19
SR64M5M5/V	M5	M5	29	4	13	10	10	1,2	0-70 NI/min	140 NI/min	19
SR64M5M5/B	M5	M5	29	4	13	10	10	1,2	0-70 NI/min	140 NI/min	19

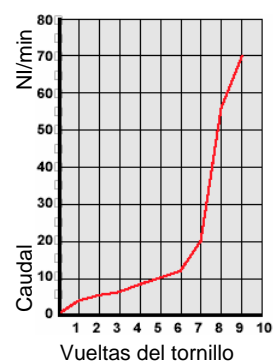


SR65/C – SR65/V – SR65/B
SR65 MINI REGULADOR CONICO MACHO

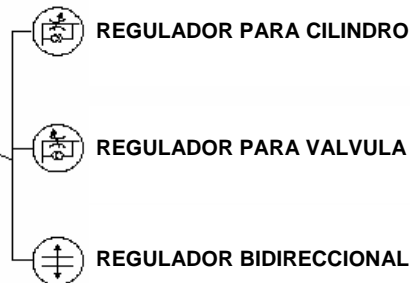

CODIGO	A	B	C	D	E	F	CH	Ø	Q⇒R	R⇒Q	Gr
SR650418/C	1/8	4	29,5	8	22,5	10	10	1,2	0-70 NI/min	140 NI/min	21
SR650518/C	1/8	5	29,5	8	22,5	10	10	1,2	0-70 NI/min	140 NI/min	21
SR650618/C	1/8	6	29,5	8	24	12	10	1,2	0-70 NI/min	140 NI/min	30
SR650418/V	1/8	4	29,5	8	22,5	10	10	1,2	0-70 NI/min	140 NI/min	21
SR650518/V	1/8	5	29,5	8	22,5	10	10	1,2	0-70 NI/min	140 NI/min	21
SR650618/V	1/8	6	29,5	8	24	12	10	1,2	0-70 NI/min	140 NI/min	30
SR650418/B	1/8	4	29,5	8	22,5	10	10	1,2	0-70 NI/min	140 NI/min	21
SR650518/B	1/8	5	29,5	8	22,5	10	10	1,2	0-70 NI/min	140 NI/min	21
SR650618/B	1/8	6	29,5	8	24	12	10	1,2	0-70 NI/min	140 NI/min	30





SR66/C – SR66/V – SR66/B SR66 REGULADOR CONICO MACHO

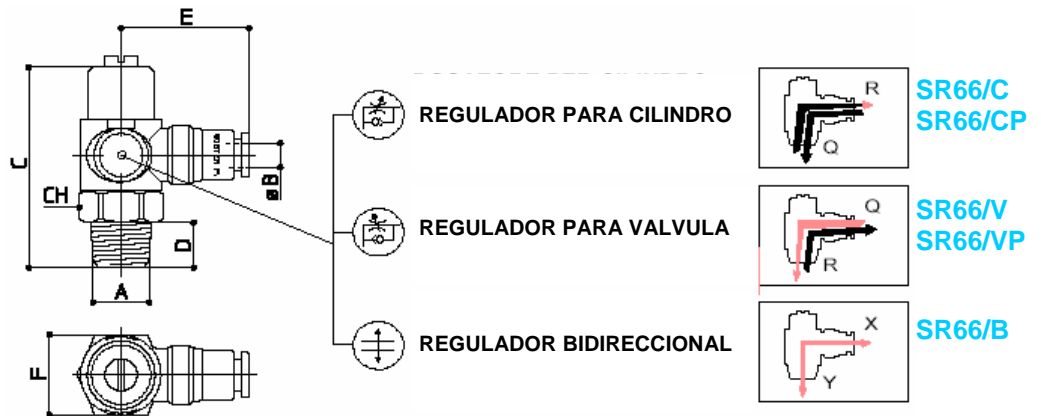


CODIGO	A	B	C	D	E	F	CH	Ø	Q⇒R	R⇒Q	Gr
SR660418/C	1/8	4	38	8	24	15,5	14	2	0-200 NI/min	200 NI/min	38
SR660518/C	1/8	5	38	8	24	15,5	14	3	0-400 NI/min	360 NI/min	40
SR660618/C	1/8	6	38	8	27	15,5	14	3,5	0-600 NI/min	480 NI/min	42
SR660614/C	1/4	6	44,5	10	28,5	17,8	16	4	0-600 NI/min	500 NI/min	63
SR660818/C	1/8	8	38	8	29	15,5	14	3,5	0-680 NI/min	500 NI/min	44
SR660814/C	1/4	8	44,5	10	30	17,8	16	4,5	0-850 NI/min	650 NI/min	65
SR661014/C	1/4	10	44,5	10	3	178	16	4,5	0-900 NI/min	700 NI/min	68
SR660418/CP	1/8	4	38	8	24	15,5	14	2	0-200 NI/min	200 NI/min	38
SR660518/CP	1/8	5	38	8	24	15,5	14	3	0-400 NI/min	360 NI/min	40
SR660618/CP	1/8	6	38	8	27	15,5	14	3,5	0-600 NI/min	480 NI/min	42
SR660614/CP	1/4	6	44,5	10	28,5	17,8	16	4	0-600 NI/min	500 NI/min	63
SR660818/CP	1/8	8	38	8	29	15,5	14	3,5	0-680 NI/min	500 NI/min	44
SR660814/CP	1/4	8	44,5	10	30	17,8	16	4,5	0-850 NI/min	650 NI/min	65
SR661014/CP	1/4	10	44,5	10	3	178	16	4,5	0-900 NI/min	700 NI/min	68
SR660418/V	1/8	4	38	8	24	15,5	14	2	0-200 NI/min	200 NI/min	38
SR660518/V	1/8	5	38	8	24	15,5	14	3	0-400 NI/min	360 NI/min	40
SR660618/V	1/8	6	38	8	27	15,5	14	3,5	0-600 NI/min	480 NI/min	42
SR660614/V	1/4	6	44,5	10	28,5	17,8	16	4	0-600 NI/min	500 NI/min	63
SR660818/V	1/8	8	38	8	29	15,5	14	3,5	0-680 NI/min	500 NI/min	44
SR660814/V	1/4	8	44,5	10	30	17,8	16	4,5	0-850 NI/min	650 NI/min	65
SR661014/V	1/4	10	44,5	10	3	178	16	4,5	0-900 NI/min	700 NI/min	68
SR660418/VP	1/8	4	38	8	24	15,5	14	2	0-200 NI/min	200 NI/min	38
SR660518/VP	1/8	5	38	8	24	15,5	14	3	0-400 NI/min	360 NI/min	40
SR660618/VP	1/8	6	38	8	27	15,5	14	3,5	0-600 NI/min	480 NI/min	42
SR660614/VP	1/4	6	44,5	10	28,5	17,8	16	4	0-600 NI/min	500 NI/min	63
SR660818/VP	1/8	8	38	8	29	15,5	14	3,5	0-680 NI/min	500 NI/min	44
SR660814/VP	1/4	8	44,5	10	30	17,8	16	4,5	0-850 NI/min	650 NI/min	65
SR661014/VP	1/4	10	44,5	10	3	178	16	4,5	0-900 NI/min	700 NI/min	68
SR660418/B	1/8	4	38	8	24	15,5	14	2	0-200 NI/min	200 NI/min	38
SR660518/B	1/8	5	38	8	24	15,5	14	3	0-400 NI/min	360 NI/min	40
SR660618/B	1/8	6	38	8	27	15,5	14	3,5	0-600 NI/min	480 NI/min	42
SR660614/B	1/4	6	44,5	10	28,5	17,8	16	4	0-600 NI/min	500 NI/min	63
SR660818/B	1/8	8	38	8	29	15,5	14	3,5	0-680 NI/min	500 NI/min	44
SR660814/B	1/4	8	44,5	10	30	17,8	16	4,5	0-850 NI/min	650 NI/min	65
SR661014/B	1/4	10	44,5	10	3	178	16	4,5	0-900 NI/min	700 NI/min	68

SR67/C – SR67/V – SR67/B
SR67 MAXI REGULADOR CONICO MACHO

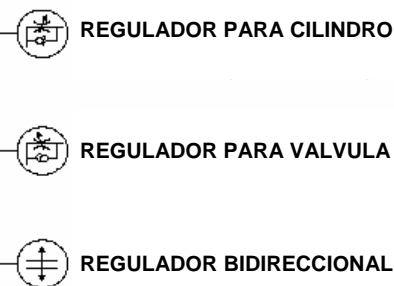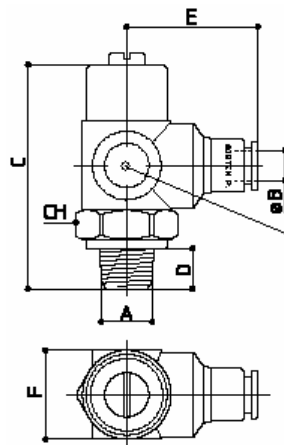

SR67/C
SR67/CP



SR67/V
SR67/VP




SR67/B

CODIGO	A	B	C	D	E	F	CH	Ø	Q⇒R	R⇒Q	Gr
SR670814/C	1/4	8	56	10	32,5	23	22	6	0-1300 NI/min	1000 NI/min	127
SR670838/C	3/8	8	57	11	32,5	23	22	6	0-1450 NI/min	1000 NI/min	131
SR671014/C	1/4	10	56	10	33,5	23	22	7	0-1700 NI/min	1100 NI/min	131
SR671038/C	3/8	10	57	11	33,5	23	22	7	0-1700 NI/min	1250 NI/min	134
SR671238/C	3/8	12	57	11	37	23	22	7	0-1750 NI/min	1300 NI/min	137
SR671212/C	1/2	12	60	14	37	23	22	7	0-1800 NI/min	1300 NI/min	154
SR670814/CP	1/4	8	56	10	32,5	23	22	6	0-1300 NI/min	1000 NI/min	127
SR670838/CP	3/8	8	57	11	32,5	23	22	6	0-1450 NI/min	1000 NI/min	131
SR671014/CP	1/4	10	56	10	33,5	23	22	7	0-1700 NI/min	1100 NI/min	131
SR671038/CP	3/8	10	57	11	33,5	23	22	7	0-1700 NI/min	1250 NI/min	134
SR671238/CP	3/8	12	57	11	37	23	22	7	0-1750 NI/min	1300 NI/min	137
SR671212/CP	1/2	12	60	14	37	23	22	7	0-1800 NI/min	1300 NI/min	154
SR670814/V	1/4	8	56	10	32,5	23	22	6	0-1300 NI/min	1000 NI/min	127
SR670838/V	3/8	8	57	11	32,5	23	22	6	0-1450 NI/min	1000 NI/min	131
SR671014/V	1/4	10	56	10	33,5	23	22	7	0-1700 NI/min	1100 NI/min	131
SR671038/V	3/8	10	57	11	33,5	23	22	7	0-1700 NI/min	1250 NI/min	134
SR671238/V	3/8	12	57	11	37	23	22	7	0-1750 NI/min	1300 NI/min	137
SR671212/V	1/2	12	60	14	37	23	22	7	0-1800 NI/min	1300 NI/min	154
SR670814/VP	1/4	8	56	10	32,5	23	22	6	0-1300 NI/min	1000 NI/min	127
SR670838/VP	3/8	8	57	11	32,5	23	22	6	0-1450 NI/min	1000 NI/min	131
SR671014/VP	1/4	10	56	10	33,5	23	22	7	0-1700 NI/min	1100 NI/min	131
SR671038/VP	3/8	10	57	11	33,5	23	22	7	0-1700 NI/min	1250 NI/min	134
SR671238/VP	3/8	12	57	11	37	23	22	7	0-1750 NI/min	1300 NI/min	137
SR671212/VP	1/2	12	60	14	37	23	22	7	0-1800 NI/min	1300 NI/min	154
SR670814/B	1/4	8	56	10	32,5	23	22	6	0-1300 NI/min	1000 NI/min	127
SR670838/B	3/8	8	57	11	32,5	23	22	6	0-1450 NI/min	1000 NI/min	131
SR671014/B	1/4	10	56	10	33,5	23	22	7	0-1700 NI/min	1100 NI/min	131
SR671038/B	3/8	10	57	11	33,5	23	22	7	0-1700 NI/min	1250 NI/min	134
SR671238/B	3/8	12	57	11	37	23	22	7	0-1750 NI/min	1300 NI/min	137
SR671212/B	1/2	12	60	14	37	23	22	7	0-1800 NI/min	1300 NI/min	154


SR68/C – SR68/V – SR68/B

SR68 REGULADOR CONICO MACHO CILINDRICO HEMBRA

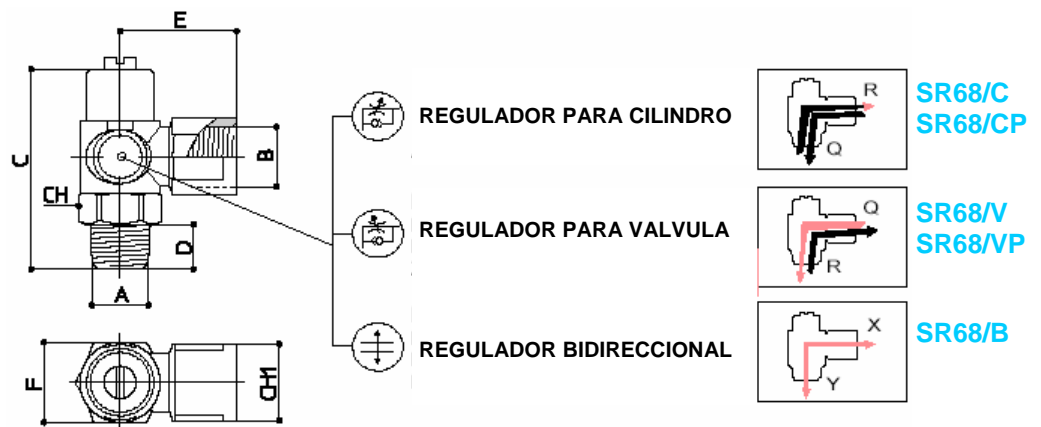

CODIGO	A	B	C	D	E	F	CH	CH1	Ø	Q→R	R→Q	Gr
SR68M518/C	1/8	M5	29,5	8	13	10	10	-	1,2	0-70 NI/min	140 NI/min	21
SR681818/C	1/8	1/8	38	8	21,5	15,5	14	13	3,5	0-600 NI/min	480 NI/min	43
SR681414/C	1/4	1/4	44,5	10	26	17,8	16	17	4,5	0-850 NI/min	650 NI/min	62
SR683838/C	3/8	3/8	57	11	26,5	23	22	21	7	0-1700 NI/min	1250 NI/min	129
SR681212/C	1/2	1/2	60	14	33,5	23	22	26	7	0-1800 NI/min	1300 NI/min	163
SR68M518/CP	1/8	M5	29,5	8	13	10	10	-	1,2	0-70 NI/min	140 NI/min	21
SR681818/CP	1/8	1/8	38	8	21,5	15,5	14	13	3,5	0-600 NI/min	480 NI/min	43
SR681414/CP	1/4	1/4	44,5	10	26	17,8	16	17	4,5	0-850 NI/min	650 NI/min	62
SR683838/CP	3/8	3/8	57	11	26,5	23	22	21	7	0-1700 NI/min	1250 NI/min	129
SR681212/CP	1/2	1/2	60	14	33,5	23	22	26	7	0-1800 NI/min	1300 NI/min	163
SR68M518/V	1/8	M5	29,5	8	13	10	10	-	1,2	0-70 NI/min	140 NI/min	21
SR681818/V	1/8	1/8	38	8	21,5	15,5	14	13	3,5	0-600 NI/min	480 NI/min	43
SR681414/V	1/4	1/4	44,5	10	26	17,8	16	17	4,5	0-850 NI/min	650 NI/min	62
SR683838/V	3/8	3/8	57	11	26,5	23	22	21	7	0-1700 NI/min	1250 NI/min	129
SR681212/V	1/2	1/2	60	14	33,5	23	22	26	7	0-1800 NI/min	1300 NI/min	163
SR68M518/VP	1/8	M5	29,5	8	13	10	10	-	1,2	0-70 NI/min	140 NI/min	21
SR681818/VP	1/8	1/8	38	8	21,5	15,5	14	13	3,5	0-600 NI/min	480 NI/min	43
SR681414/VP	1/4	1/4	44,5	10	26	17,8	16	17	4,5	0-850 NI/min	650 NI/min	62
SR683838/VP	3/8	3/8	57	11	26,5	23	22	21	7	0-1700 NI/min	1250 NI/min	129
SR681212/VP	1/2	1/2	60	14	33,5	23	22	26	7	0-1800 NI/min	1300 NI/min	163
SR68M518/B	1/8	M5	29,5	8	13	10	10	-	1,2	0-70 NI/min	140 NI/min	21
SR681818/B	1/8	1/8	38	8	21,5	15,5	14	13	3,5	0-600 NI/min	480 NI/min	43
SR681414/B	1/4	1/4	44,5	10	26	17,8	16	17	4,5	0-850 NI/min	650 NI/min	62
SR683838/B	3/8	3/8	57	11	26,5	23	22	21	7	0-1700 NI/min	1250 NI/min	129
SR681212/B	1/2	1/2	60	14	33,5	23	22	26	7	0-1800 NI/min	1300 NI/min	163

SR69/C – SR69/V – SR69/B
SR69 REGULADOR CILINDRICO MACHO

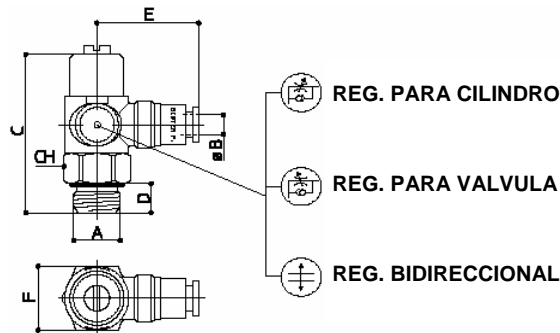

SR69/C
SR69/CP




SR69/V
SR69/VP



SR69/B


CODIGO	A	B	C	D	E	F	CH	Ø	Q→R	R→Q	Gr
SR6904M5/C	M5	4	37,5	4	24	15,5	14	2	0-170 NI/min	180 NI/min	40
SR690418/C	1/8	4	38	6	24	15,5	14	2	0-200 NI/min	200 NI/min	41
SR6905M5/C	M5	5	37,5	4	24	15,5	14	2,5	0-330 NI/min	220 NI/min	41
SR690518/C	1/8	5	38	6	24	15,5	14	3	0-400 NI/min	360 NI/min	43
SR6906M5/C	M5	6	37,5	4	27	15,5	14	2,5	0-360 NI/min	260 NI/min	43
SR690618/C	1/8	6	38	6	27	15,5	14	3,5	0-600 NI/min	480 NI/min	44
SR690614/C	1/4	6	44	8	28,5	17,8	16	4	0-600 NI/min	500 NI/min	67
SR690818/C	1/8	8	38	6	29	15,5	14	3,5	0-680 NI/min	500 NI/min	43
SR690814/C	1/4	8	44	8	30	17,8	16	4,5	0-850 NI/min	650 NI/min	68
SR691014/C	1/4	10	44	8	31	17,8	16	4,5	0-900 NI/min	700 NI/min	68
SR6904M5/CP	M5	4	37,5	4	24	15,5	14	2	0-170 NI/min	180 NI/min	40
SR690418/CP	1/8	4	38	6	24	15,5	14	2	0-200 NI/min	200 NI/min	41
SR6905M5/CP	M5	5	37,5	4	24	15,5	14	2,5	0-330 NI/min	220 NI/min	41
SR690518/CP	1/8	5	38	6	24	15,5	14	3	0-400 NI/min	360 NI/min	43
SR6906M5/CP	M5	6	37,5	4	27	15,5	14	2,5	0-360 NI/min	260 NI/min	43
SR690618/CP	1/8	6	38	6	27	15,5	14	3,5	0-600 NI/min	480 NI/min	44
SR690614/CP	1/4	6	44	8	28,5	17,8	16	4	0-600 NI/min	500 NI/min	67
SR690818/CP	1/8	8	38	6	29	15,5	14	3,5	0-680 NI/min	500 NI/min	43
SR690814/CP	1/4	8	44	8	30	17,8	16	4,5	0-850 NI/min	650 NI/min	68
SR691014/CP	1/4	10	44	8	31	17,8	16	4,5	0-900 NI/min	700 NI/min	68
SR6904M5/V	M5	4	37,5	4	24	15,5	14	2	0-170 NI/min	180 NI/min	40
SR690418/V	1/8	4	38	6	24	15,5	14	2	0-200 NI/min	200 NI/min	41
SR6905M5/V	M5	5	37,5	4	24	15,5	14	2,5	0-330 NI/min	220 NI/min	41
SR690518/V	1/8	5	38	6	24	15,5	14	3	0-400 NI/min	360 NI/min	43
SR6906M5/V	M5	6	37,5	4	27	15,5	14	2,5	0-360 NI/min	260 NI/min	43
SR690618/V	1/8	6	38	6	27	15,5	14	3,5	0-600 NI/min	480 NI/min	44
SR690614/V	1/4	6	44	8	28,5	17,8	16	4	0-600 NI/min	500 NI/min	67
SR690818/V	1/8	8	38	6	29	15,5	14	3,5	0-680 NI/min	500 NI/min	43
SR690814/V	1/4	8	44	8	30	17,8	16	4,5	0-850 NI/min	650 NI/min	68
SR691014/V	1/4	10	44	8	31	17,8	16	4,5	0-900 NI/min	700 NI/min	68
SR6904M5/VP	M5	4	37,5	4	24	15,5	14	2	0-170 NI/min	180 NI/min	40
SR690418/VP	1/8	4	38	6	24	15,5	14	2	0-200 NI/min	200 NI/min	41
SR6905M5/VP	M5	5	37,5	4	24	15,5	14	2,5	0-330 NI/min	220 NI/min	41
SR690518/VP	1/8	5	38	6	24	15,5	14	3	0-400 NI/min	360 NI/min	43
SR6906M5/VP	M5	6	37,5	4	27	15,5	14	2,5	0-360 NI/min	260 NI/min	43
SR690618/VP	1/8	6	38	6	27	15,5	14	3,5	0-600 NI/min	480 NI/min	44
SR690614/VP	1/4	6	44	8	28,5	17,8	16	4	0-600 NI/min	500 NI/min	67
SR690818/VP	1/8	8	38	6	29	15,5	14	3,5	0-680 NI/min	500 NI/min	43
SR690814/VP	1/4	8	44	8	30	17,8	16	4,5	0-850 NI/min	650 NI/min	68
SR691014/VP	1/4	10	44	8	31	17,8	16	4,5	0-900 NI/min	700 NI/min	68
SR6904M5/B	M5	4	37,5	4	24	15,5	14	2	0-170 NI/min	180 NI/min	40
SR690418/B	1/8	4	38	6	24	15,5	14	2	0-200 NI/min	200 NI/min	41
SR6905M5/B	M5	5	37,5	4	24	15,5	14	2,5	0-330 NI/min	220 NI/min	41
SR690518/B	1/8	5	38	6	24	15,5	14	3	0-400 NI/min	360 NI/min	43
SR6906M5/B	M5	6	37,5	4	27	15,5	14	2,5	0-360 NI/min	260 NI/min	43
SR690618/B	1/8	6	38	6	27	15,5	14	3,5	0-600 NI/min	480 NI/min	44
SR690614/B	1/4	6	44	8	28,5	17,8	16	4	0-600 NI/min	500 NI/min	67
SR690818/B	1/8	8	38	6	29	15,5	14	3,5	0-680 NI/min	500 NI/min	43
SR690814/B	1/4	8	44	8	30	17,8	16	4,5	0-850 NI/min	650 NI/min	68
SR691014/B	1/4	10	44	8	31	17,8	16	4,5	0-900 NI/min	700 NI/min	68

SR70/C – SR70/V – SR70/B SR70 MAXI REGULADOR CILINDRICO MACHO

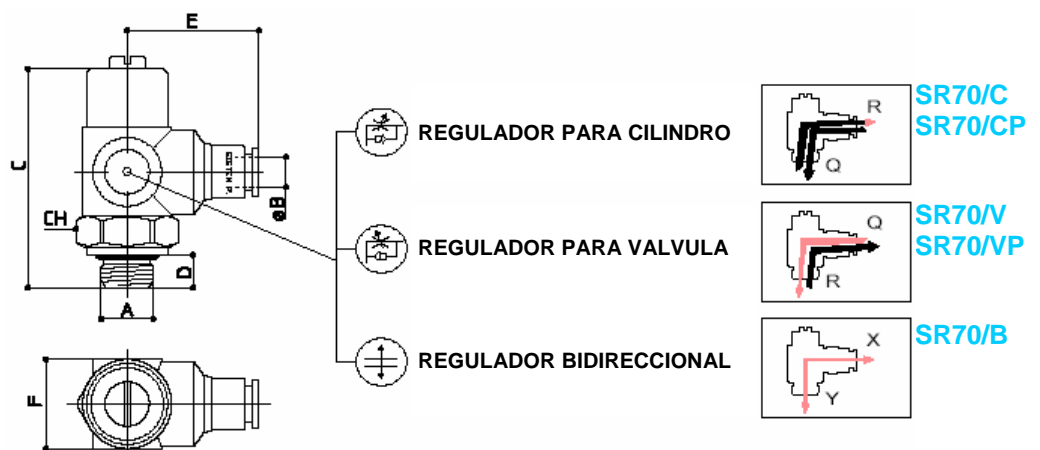




CODIGO	A	B	C	D	E	F	CH	Ø	Q⇒R	R⇒Q	Gr
SR700814/C	1/4	8	54	8	32,5	23	22	6	0-1300 NI/min	1000 NI/min	124
SR700838/C	3/8	8	57	10	32,5	23	22	6	0-1450 NI/min	1000 NI/min	131
SR701014/C	1/4	10	54	8	33,5	23	22	7	0-1700 NI/min	1100 NI/min	126
SR701038/C	3/8	10	57	10	33,5	23	22	7	0-1700 NI/min	1250 NI/min	134
SR701238/C	3/8	12	57	10	37	23	22	7	0-1750 NI/min	1300 NI/min	142
SR701212/C	1/2	12	59	12	37	23	24	7	0-1800 NI/min	1300 NI/min	155
SR700814/CP	1/4	8	54	8	32,5	23	22	6	0-1300 NI/min	1000 NI/min	124
SR700838/CP	3/8	8	57	10	32,5	23	22	6	0-1450 NI/min	1000 NI/min	131
SR701014/CP	1/4	10	54	8	33,5	23	22	7	0-1700 NI/min	1100 NI/min	126
SR701038/CP	3/8	10	57	10	33,5	23	22	7	0-1700 NI/min	1250 NI/min	134
SR701238/CP	3/8	12	57	10	37	23	22	7	0-1750 NI/min	1300 NI/min	142
SR701212/CP	1/2	12	59	12	37	23	24	7	0-1800 NI/min	1300 NI/min	155
SR700814/V	1/4	8	54	8	32,5	23	22	6	0-1300 NI/min	1000 NI/min	124
SR700838/V	3/8	8	57	10	32,5	23	22	6	0-1450 NI/min	1000 NI/min	131
SR701014/V	1/4	10	54	8	33,5	23	22	7	0-1700 NI/min	1100 NI/min	126
SR701038/V	3/8	10	57	10	33,5	23	22	7	0-1700 NI/min	1250 NI/min	134
SR701238/V	3/8	12	57	10	37	23	22	7	0-1750 NI/min	1300 NI/min	142
SR701212/V	1/2	12	59	12	37	23	24	7	0-1800 NI/min	1300 NI/min	155
SR700814/VP	1/4	8	54	8	32,5	23	22	6	0-1300 NI/min	1000 NI/min	124
SR700838/VP	3/8	8	57	10	32,5	23	22	6	0-1450 NI/min	1000 NI/min	131
SR701014/VP	1/4	10	54	8	33,5	23	22	7	0-1700 NI/min	1100 NI/min	126
SR701038/VP	3/8	10	57	10	33,5	23	22	7	0-1700 NI/min	1250 NI/min	134
SR701238/VP	3/8	12	57	10	37	23	22	7	0-1750 NI/min	1300 NI/min	142
SR701212/VP	1/2	12	59	12	37	23	24	7	0-1800 NI/min	1300 NI/min	155
SR700814/B	1/4	8	54	8	32,5	23	22	6	0-1300 NI/min	1000 NI/min	124
SR700838/B	3/8	8	57	10	32,5	23	22	6	0-1450 NI/min	1000 NI/min	131
SR701014/B	1/4	10	54	8	33,5	23	22	7	0-1700 NI/min	1100 NI/min	126
SR701038/B	3/8	10	57	10	33,5	23	22	7	0-1700 NI/min	1250 NI/min	134
SR701238/B	3/8	12	57	10	37	23	22	7	0-1750 NI/min	1300 NI/min	142
SR701212/B	1/2	12	59	12	37	23	24	7	0-1800 NI/min	1300 NI/min	155

SR71/C – SR71/V – SR71/B
SR71 REGULADOR CILINDRICO MACHO/HEMBRA

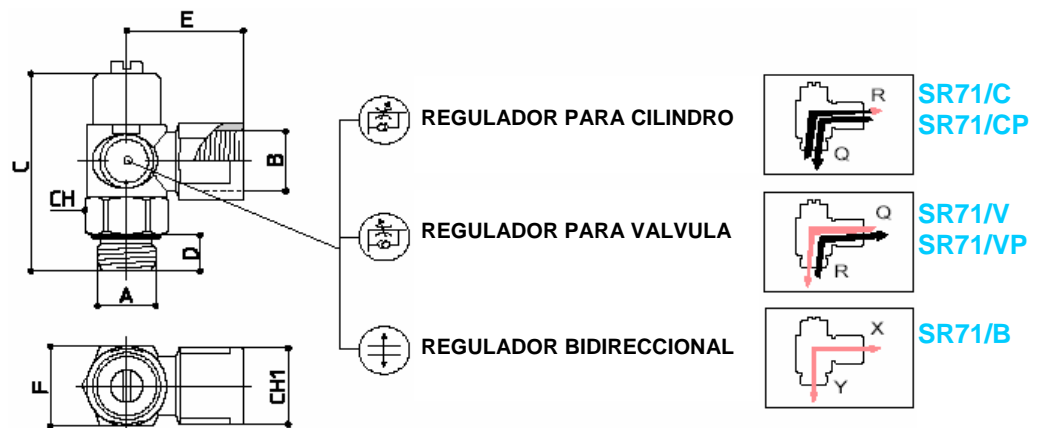


CODIGO	A	B	C	D	E	F	CH	CH1	Ø	Q⇒R	R⇒Q	Gr
SR711818/C	1/8	1/8	38	6	21,5	15,5	14	13	3,5	0-600 NI/min	480 NI/min	43
SR711414/C	1/4	1/4	44	8	26	17,8	16	17	4,5	0-850 NI/min	650 NI/min	62
SR713838/C	3/8	3/8	57	10	26,5	23	22	21	7	0-1700 NI/min	1250 NI/min	129
SR711212/C	1/2	1/2	59	12	33,5	23	24	26	7	0-1800 NI/min	1300 NI/min	163
SR711818/CP	1/8	1/8	38	6	21,5	15,5	14	13	3,5	0-600 NI/min	480 NI/min	43
SR711414/CP	1/4	1/4	44	8	26	17,8	16	17	4,5	0-850 NI/min	650 NI/min	62
SR713838/CP	3/8	3/8	57	10	26,5	23	22	21	7	0-1700 NI/min	1250 NI/min	129
SR711212/CP	1/2	1/2	59	12	33,5	23	24	26	7	0-1800 NI/min	1300 NI/min	163
SR711818/V	1/8	1/8	38	6	21,5	15,5	14	13	3,5	0-600 NI/min	480 NI/min	43
SR711414/V	1/4	1/4	44	8	26	17,8	16	17	4,5	0-850 NI/min	650 NI/min	62
SR713838/V	3/8	3/8	57	10	26,5	23	22	21	7	0-1700 NI/min	1250 NI/min	129
SR711212/V	1/2	1/2	59	12	33,5	23	24	26	7	0-1800 NI/min	1300 NI/min	163
SR711818/VP	1/8	1/8	38	6	21,5	15,5	14	13	3,5	0-600 NI/min	480 NI/min	43
SR711414/VP	1/4	1/4	44	8	26	17,8	16	17	4,5	0-850 NI/min	650 NI/min	62
SR713838/VP	3/8	3/8	57	10	26,5	23	22	21	7	0-1700 NI/min	1250 NI/min	129
SR711212/VP	1/2	1/2	59	12	33,5	23	24	26	7	0-1800 NI/min	1300 NI/min	163
SR711818/B	1/8	1/8	38	6	21,5	15,5	14	13	3,5	0-600 NI/min	480 NI/min	43
SR711414/B	1/4	1/4	44	8	26	17,8	16	17	4,5	0-850 NI/min	650 NI/min	62
SR713838/B	3/8	3/8	57	10	26,5	23	22	21	7	0-1700 NI/min	1250 NI/min	129
SR711212/B	1/2	1/2	59	12	33,5	23	24	26	7	0-1800 NI/min	1300 NI/min	163

SR72/C – SR72/V – SR72/B
SR72 REGULADOR CILINDRICO HEMBRA/HEMBRA

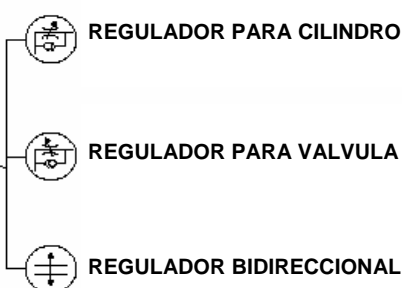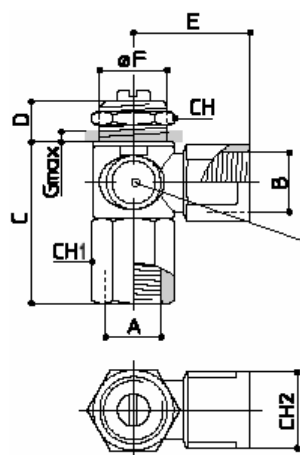

CODIGO	A	B	C	D	E	F	G	CH	CH1	CH2	Ø	Q→R	R→Q	Gr
SR721818/C	1/8	1/8	33	9	21,5	M12x100	6	14	14	13	3,5	0-600 NI/min	480 NI/min	51
SR721414/C	1/4	1/4	36	9	26	M15x100	6	18	16	17	4,5	0-850 NI/min	650 NI/min	68
SR723838/C	3/8	3/8	44	12	26,5	M17x100	9	20	21	21	7	0-1700 NI/min	1250 NI/min	145
SR721818/CP	1/8	1/8	33	9	21,5	M12x100	6	14	14	13	3,5	0-600 NI/min	480 NI/min	51
SR721414/CP	1/4	1/4	36	9	26	M15x100	6	18	16	17	4,5	0-850 NI/min	650 NI/min	68
SR723838/CP	3/8	3/8	44	12	26,5	M17x100	9	20	21	21	7	0-1700 NI/min	1250 NI/min	145
SR721818/V	1/8	1/8	33	9	21,5	M12x100	6	14	14	13	3,5	0-600 NI/min	480 NI/min	51
SR721414/V	1/4	1/4	36	9	26	M15x100	6	18	16	17	4,5	0-850 NI/min	650 NI/min	68
SR723838/V	3/8	3/8	44	12	26,5	M17x100	9	20	21	21	7	0-1700 NI/min	1250 NI/min	145
SR721818/VP	1/8	1/8	33	9	21,5	M12x100	6	14	14	13	3,5	0-600 NI/min	480 NI/min	51
SR721414/VP	1/4	1/4	36	9	26	M15x100	6	18	16	17	4,5	0-850 NI/min	650 NI/min	68
SR723838/VP	3/8	3/8	44	12	26,5	M17x100	9	20	21	21	7	0-1700 NI/min	1250 NI/min	145
SR721818/B	1/8	1/8	33	9	21,5	M12x100	6	14	14	13	3,5	0-600 NI/min	480 NI/min	51
SR721414/B	1/4	1/4	36	9	26	M15x100	6	18	16	17	4,5	0-850 NI/min	650 NI/min	68
SR723838/B	3/8	3/8	44	12	26,5	M17x100	9	20	21	21	7	0-1700 NI/min	1250 NI/min	145

SR73/C – SR73/V – SR73/B
SR73 REGULADOR TUBO/TUBO

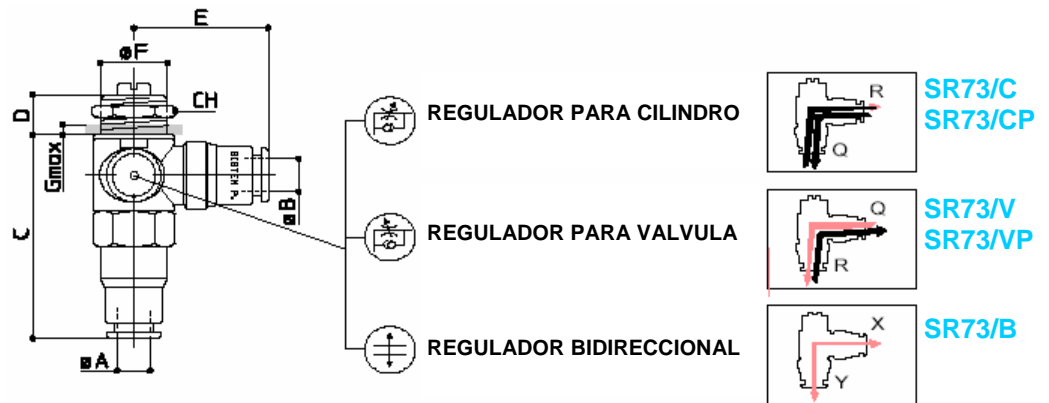

CODIGO	A	B	C	D	E	F	G	CH	Ø	Q⇒R	R⇒Q	Gr
SR730606/C	6	6	42	9	27	M12x100	6	18	3,5	0-600 NI/min	480 NI/min	52
SR730808/C	8	8	45,5	9	30	M15x100	6	18	4,5	0-850 NI/min	650 NI/min	78
SR731010/C	10	10	57	12	33,5	M17x100	9	20	7	0-1700 NI/min	1250 NI/min	145
SR731212/C	12	12	57,5	12	37	M17x100	9	20	7	0-1800 NI/min	1300 NI/min	149
SR730606/CP	6	6	42	9	27	M12x100	6	18	3,5	0-600 NI/min	480 NI/min	52
SR730808/CP	8	8	45,5	9	30	M15x100	6	18	4,5	0-850 NI/min	650 NI/min	78
SR731010/CP	10	10	57	12	33,5	M17x100	9	20	7	0-1700 NI/min	1250 NI/min	145
SR731212/CP	12	12	57,5	12	37	M17x100	9	20	7	0-1800 NI/min	1300 NI/min	149
SR730606/V	6	6	42	9	27	M12x100	6	18	3,5	0-600 NI/min	480 NI/min	52
SR730808/V	8	8	45,5	9	30	M15x100	6	18	4,5	0-850 NI/min	650 NI/min	78
SR731010/V	10	10	57	12	33,5	M17x100	9	20	7	0-1700 NI/min	1250 NI/min	145
SR731212/V	12	12	57,5	12	37	M17x100	9	20	7	0-1800 NI/min	1300 NI/min	149
SR730606/VP	6	6	42	9	27	M12x100	6	18	3,5	0-600 NI/min	480 NI/min	52
SR730808/VP	8	8	45,5	9	30	M15x100	6	18	4,5	0-850 NI/min	650 NI/min	78
SR731010/VP	10	10	57	12	33,5	M17x100	9	20	7	0-1700 NI/min	1250 NI/min	145
SR731212/VP	12	12	57,5	12	37	M17x100	9	20	7	0-1800 NI/min	1300 NI/min	149
SR730606/B	6	6	42	9	27	M12x100	6	18	3,5	0-600 NI/min	480 NI/min	52
SR730808/B	8	8	45,5	9	30	M15x100	6	18	4,5	0-850 NI/min	650 NI/min	78
SR731010/B	10	10	57	12	33,5	M17x100	9	20	7	0-1700 NI/min	1250 NI/min	145
SR731212/B	12	12	57,5	12	37	M17x100	9	20	7	0-1800 NI/min	1300 NI/min	149